

Product profile

SF61B

Mobility Scanner for
Healthcare Applications



ERGONOMIC

Compact size can be quickly and securely stowed in a smock pocket, on a belt loop, or along the arm—for unencumbered use of both hands



HEALTHCARE

Disinfectant-ready housing with IP65 seal rating protects against the harmful effects of repeated chemical wipe-downs



LASER-FREE

Completely safe laser-free design with LED aimer is ideal for patient-facing applications



SCANNING

Includes the industry's fastest 2D imaging technology for highly responsive, omni-directional scanning even on curved or shiny surfaces



RADIO

Bluetooth® wireless pairs easily with iOS®, Android® and Windows Mobile® devices, with a range of up to 100 m (325 ft)



BATTERY

Field-replaceable battery provides greater than full-shift battery life, even in scan-intensive applications

Consistent, accurate data capture is fundamental to cost-effective healthcare operations, yet traditional gun-shaped handheld scanners were not designed to move with the worker. To address this challenge and make it easier to collect data at the point of care, we developed the SF61B healthcare mobility scanner. Small enough to stow in a pocket, it travels with the worker and can be quickly accessed or securely tucked away when unencumbered use of both hands is required. This makes it ideal for today's busy healthcare environment, where complete freedom of movement is essential and the ability to scan should always be within arm's reach.

The SF61B integrates with existing healthcare information management systems and—with integrated Bluetooth wireless—easily pairs with iOS, Android and Windows Mobile smartphones and tablets. Its compact form factor is small enough to fit into awkward or constricted spaces, and a high performance imager makes it easy to scan all 1D and 2D codes—regardless of angle or orientation. High motion tolerance (up to 400 in/sec) and omni-directional reading capability result in extremely responsive,

hassle-free scanning. And to ensure safe operation in patient-facing applications, the SF61B uses a laser-free design that provides this high performance scanning capability without the risk of eye injury.

As a mobility scanner, the SF61B was engineered for all-day wireless performance. An integrated Bluetooth Class 1 radio enables wireless communication at ranges up to 100 m (325 ft) from the host, and its field-replaceable battery lasts well beyond a full shift, even in the most scan-intensive applications.

The SF61B is also highly customizable to complement your healthcare environment. With our free EasySet™ PC programming tool, you can adjust security settings, beeper volume, and even enable haptic feedback (vibration profiles). For example, a simple scan of a bar code can enable silent scanning for quiet areas, and audible tones can be easily re-enabled for louder environments. EasySet can also be used to generate printable configuration bar codes, making it easy to setup additional scanners to match.

Physical Characteristics

Dimensions (LxWxH), including ring end-cap:
16.0 cm (6.3 in) x 4.6 cm (1.8 in) x 3.9 cm (1.5 in)
Weight: 184 gm (6.5 oz)

Electrical Specifications

Battery: Lithium-ion rechargeable (2,600 mAh)
Battery Life¹: 28,000 scans (1D) or 25,000 scans (2D), with 1 scan every 4 seconds²
Recharging Time: 3 hours

¹Battery life may vary depending on ambient temperature, ambient light and battery life.

²Typical number of scans possible without a battery recharge, in a typical office environment (250 lux) at ambient temperature.

Bluetooth Radio

Type: Bluetooth Class 1 v2.1+EDR
Frequency: 2.4 GHz with Adaptive Frequency Hopping
Range: 100 m (325 ft) in open space, 30 m (100 ft) in typical work environment
Profiles: HID, SPP

Connectivity

Operating System Compatibility: Apple iOS®; Google Android®; Microsoft Windows® XP, Vista, 7, 8

Scan Technology

Intermec 2D Imager with LED Aimer (EA31)

Reading Performance

Maximum Code Resolution:

1D: 4 mils
2D/HP: 6.6 mils

Print Contrast:

1D: 20%
2D/HP: 20%

Motion Tolerance: Up to 400 in/s

User Feedback

- Indicator LED
- Configurable buzzer
- Configurable vibrator (haptic feedback)

1D Bar Code Symbolologies Supported

Codabar, Code 11, Code 39, Code 93/93i, Code 128 / GS1-128, EAN/UPC, GS1 DataBar Limited, GS1 Composite (linear only), GS1 DataBar Expanded, GS1 DataBar limited, GS1 DataBar Omnidirectional, Interleaved 2 of 5, Matrix 2 of 5, MSI, Plessey, Standard 2 of 5, Telepen

2D Bar Code Symbolologies Supported

DataMatrix, QR Code, Micro QR, PDF417, Micro PDF417, Aztec, Maxicode, Han Xin, Codablock A, Codablock F, GS1 Composite, TLC 39

Postal Bar Code Symbolologies Supported

Australian Post, BPO, Canada Post, Dutch Post, Infomail, Intelligent Mail, Japan Post, Planet, Postnet, Sweden Post

Environment

Housing: Disinfectant ready
Operating Temperature: -20°C to +50°C (-4°F to +122°F)
Storage Temperature: -40°C to +70°C (-40°F to +158°F)
Charging Temperature: 0°C to 45°C (32°F to 113°F)
Relative Humidity: 5 to 95% non-condensing
Drop: 26 drops from 2m (6.5 ft.) to concrete
Environmental Rating: IP65
Ambient Light: 0 to 100,000 lux

Regulatory Approvals & Compliance

1016SP01B (SF61B)
Safety: cULus Listed
EMC: Class B - FCC/ICES, CE
Radio: FCC, Industry Canada, CE
Environmental: EU Directives-WEEE; RoHS; Batteries & Accumulators; Packaging & Waste Packaging

Standard Warranty

Three year standard warranty, with extended protection available through Intermec Medallion Support Services.

Accessories


View the SF61B Accessory Guide for complete details.

- Single Bay Charger*
- Four Bay Charger*
- Belt Clip Holder*
- Industrial Belt Clip Holder*
- Chest Strap Holder*
- Wireless Base Station*
- Ring End-Cap With Wrist Strap
- Easyset™ Configuration Software

* These accessories, originally developed for SF51, are also compatible with SF61B.

Typical Reading Distances*

SF61BHC

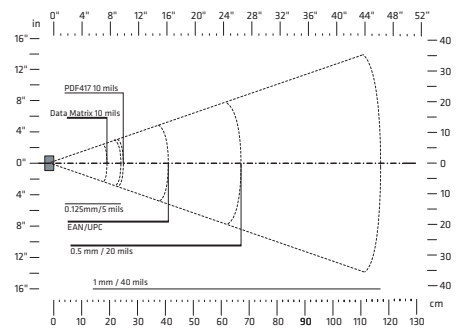

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.1 mm (4 mils)	4 cm (1.57 in)	19 cm (7.48 in)
	0.125 mm (5 mils)	4 cm (1.57 in)	24 cm (9.45 in)
	0.5 mm (20 mils)	6 cm (2.36 in)	67 cm (26.38 in)
	1 mm (40 mils)	14 cm (5.51 in)	117 cm (46.06 in)
EAN/UPC	0.33 mm (13 mils)	5 cm (1.97 in)	41 cm (16.14 in)
PDF417	0.25 mm (10 mils)	4 cm (1.57 in)	25 cm (9.84 in)
DataMatrix	0.38 mm (15 mils)	4 cm (1.57 in)	36 cm (14.17 in)
	0.25 mm (10 mils)	5 cm (1.97 in)	19 cm (7.48 in)

* The reading distances for each scanner are typical distances measured from the front end of the scanner bezel in an office environment (200 lux) with extended reading range activated (if applicable).

North America

Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
Phone: (425) 348 2600
Fax: (425) 355 9551

North Latin America

Headquarters Office
Mexico
Phone: (+52) 55 52 41 48 00
Toll Free NOLA:
01800 490 4990

South Latin America

Headquarters Office
Brazil
Phone: (+55) 11 3711 6770
Fax: (+55) 11 5502 6780

Europe, Middle East & Africa

Headquarters Office
Reading, United Kingdom
Phone: (+44) 118 923 0800
Fax: (+44) 118 923 0801

Asia Pacific

Headquarters Office
Singapore
Phone: (+65) 6303 2100
Fax: (+65) 6303 2199

Media Sales

EMEA: (+31) 24 372 3167
USA: (513) 874 5882
<http://intermec.custhelp.com>

Sales

Toll Free NA: (800) 934 3163
Toll in NA: (425) 348 2726
Freephone ROW:
00800 4488 8844

OEM Sales

Phone: (425) 348 2762

Customer Service

and Support
Toll Free NA: (800) 755 5505
Toll in NA: (425) 356 1799
EMEA: intermec.custhelp.com

Internet

www.intermec.com

Worldwide Locations

www.intermec.com/locations



Copyright © 2013 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners.
612289-A 08/13

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.



multisystems

Η multisystems διανέμει και υποστηρίζει τεχνικά, προϊόντα από τους μεγαλύτερους οίκους κατασκευής σε Barcode scanners, εκτυπωτές ετικετών, φορητά τερματικά, λύσεις πλαστικών καρτών τύπου πιστωτικής καθώς και συστήματα λιανικής πώλησης όπως συστήματα Point of sale, ταμειακές μηχανές και φορολογικούς μηχανισμούς.

Στις εγκαταστάσεις μας στο Αιγάλεω λειτουργεί πλήρως εξοπλισμένο τεχνικό εργαστήριο με άρτια καταρτισμένους μηχανικούς που μπορούν να δώσουν λύσεις ακόμα και στις πιο δύσκολες μηχανογραφικές προκλήσεις του χώρου της βιομηχανίας, της εφοδιαστικής αλυσίδας και της λιανικής.

Σας εξυπηρετούμε έναν – έναν προσωπικά προσφέροντας σας τον προσωπικό σας τεχνικό σύμβουλο ο οποίος γνωρίζει τις ανάγκες και τις ιδιαιτερότητες της επιχείρησής σας ενώ σας εξυπηρετεί σε όλη την πορεία της συνεργασίας σας μαζί μας ή εξέλιξης του έργου σας. Είμαστε δίπλα σας να σας συμβουλέψουμε να επιλέξετε τον σωστό εξοπλισμό μέσα από μια ευρύτατη γκάμα 12.000 προϊόντων τεχνολογίας για όλες τις ανάγκες από τα πιο επώνυμα εργοστάσια της παγκόσμιας αγοράς.

Για την καλύτερη εξυπηρέτησή σας έχουμε διαχωρίσει τα εμπορικά και τα τεχνικά μας τμήματα σε 6 διακριτές ενότητες τις οποίες μπορείτε να δείτε στον πίνακα που ακολουθεί προκειμένου να σας εξυπηρετούμε γρήγορα και αποτελεσματικά. Για οτιδήποτε χρειαστείτε μην διστάσετε να επικοινωνήσετε μαζί μας στο **211 780 1000**, θα χαρούμε να σας εξυπηρετήσουμε.

Η multisystems διαθέτει και υποστηρίζει



Barcode scanners

Ενσύρματα | Ασύρματα | 2D Imagers | Bluetooth IOS / Android | Λιανικής



Εκτυπωτές ετικετών & αναλώσιμα

Επιτραπέζιοι | Βιομηχανικοί | Έγχρωμοι | Ετικέτες | Μελανοταινίες



Φορητά τερματικά

Φορητά τερματικά | Βιομηχανικά Tablets | Τερματικά αυτοκινήτου / Κλαρκ



Συστήματα λιανικής πώλησης Point of sale

Συστήματα POS | Touchscreen οθόνες | Θερμικοί εκτυπωτές



Λύσεις πλαστικών καρτών

Εκτυπωτές πλαστικών καρτών | Αναλώσιμα | Πλαστικές κάρτες PVC



Φορολογικά προϊόντα

Ταμειακές μηχανές | Φορολογικοί μηχανισμοί | Φορολογικοί εκτυπωτές

Συνεργαζόμενοι οίκοι

DATALOGIC

ZEBRA

hp Gold Partner

Honeywell

PERFORMANCE PARTNER PROGRAM SILVER LEVEL

EPSON AUTHORISED PARTNER 2015

Intermec®

do™

datamax • o'neil

elo TOUCH SOLUTIONS

socket® mobile

evolis card printers

AVATO

CITIZEN Micro HumanTech



multisystems

ACR Electronics ΕΠΕ

Λεωφ. Θηβών 339, 122 43, Αιγάλεω

<http://www.multisystems.gr> | info@multisystems.gr

Tel. 211 780 1000 Fax 211 780 2000