

POS Peripherals

SCD122 USB Powered Display

The new, fast, easy-to-read 2 lines x 20 character customer display from Star with ESC/POS™, and OPOS™ support.

- Supplied with a choice of support including stand alone base and telescopic pole
- High speed data transfer using 2.0 USB interface
- Clear, fast easy-to-read with wide viewing angle
- ESC/POS™ emulation (dip switch selectable)
- Cyrillic character support (multiple code pages)



NEW

SCD400 Customer Display


For use with POS and ECR Systems. The Star SCD400 Display uses the same serial interface as the Star POS printer.

- Reliable and versatile 2 lines x 20 character customer display
- Large, clear, easy-to-read characters
- Wide viewing angle
- Single interface for display and printer
- New charcoal grey & Star white versions available



SCD122 & SCD400 Customer Display Specifications

	SCD122	SCD400		SCD122	SCD400
Display Method	Vacuum fluorescent display		Emulation:		
Display Colour	Blue-Green		ESC/POS™ compatible	ESC/POS™ DMD110 via dip switch	not available
No. of Characters	40 (20 columns x 2 lines)		Star Mode	Standard	Standard
Character Font	5 x 7 dot matrix		Operating Conditions:		
Character size (H x W)	5.00 x 3.5mm	9 x 5.25mm	Temperature	5 - 45°C	5 - 45°C
Brightness	min. 350 cd/m ²		Humidity	10% - 90% RH	10% - 85% RH
Tilt angle	max 30° / Rotation 300°	max 30° / Rotation 360°	Storage Conditions:		
Power Consumption	max. 500mA @ 5V (2.5W) USB powered	max. 400mA @ 12V (4.8W) USB powered	Temperature	-20 - 60°C	-20 - 60°C
Interface	USB 2.0	Serial RS232 C	Humidity	10% - 90% RH	10% - 90% RH
			Dimensions (w x d x h):		
			Display Unit	175 x 53 x 72mm	231 x 45 x 110mm
			Stand alone height	142 / 272 / 387 / 517mm	not available
			Stand alone base	175 x 110 x 61mm	not available
			Telescopic Pole height	124 / 254 / 369 / 499mm	380 - 550mm
			Pole Base	40mm height	12mm height
				80mm diameter	80mm diameter
			Weight	1.4Kg packaged with base & supports	approx 850g
			Colour	Both available in Charcoal grey and Star white	

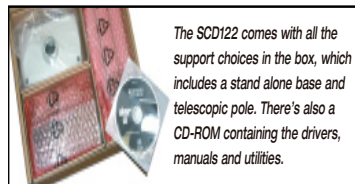

The SCD122 comes with all the support choices in the box, which includes a stand alone base and telescopic pole. There's also a CD-ROM containing the drivers, manuals and utilities.

CB-2002 and CB-92 II

Versatile Cash Drawers for PC Point of Sale Systems

- Sturdy reliable PC POS cash drawers
 - Driven from the peripheral drive circuit of a Star or Epson POS printer
 - 3 position key lock
 - Both versions include a compulsion switch
- Star's Series of cash drawers have been specifically designed to link with Star's and other industry standard POS printers. They range from the basic entry level model to the larger version aimed at markets with more note sizes.



CB-2002 Specifications

Connection to Peripheral Drive Circuit of Star Printer	Via 6-pin Modular plug connected to cash drawer by shielded cable with separated ground wire
Cash Tray Combination	8 Note and 8 Coin plus external Voucher / Cheque slot
Dimensions	410 (W) x 415 (D) x 114 (H) mm
Weight	7Kg
Input Voltage & Current	DC 24 Volt, 1 amp
Pulse Time	100ms (max), 30ms (min)
Colour	Star white or new "Darker" charcoal grey versions
Drawer Release	3 position key lock with Drawer Release
Options available	Under desk "Z" brackets, Lockable cover, Note Holder Bracket and Note Divider

CB-92 II Specifications


Connection to Peripheral Drive Circuit of Star Printer	Via 6-pin Modular plug connected to cash drawer by shielded cable with separated ground wire
Cash Tray Combination	5 Note and 8 Coin
Dimensions	460 (W) x 460 (D) x 113 (H) mm
Weight	10.3Kg
Input Voltage & Current	DC 24 Volt, 1 amp
Pulse Time	100ms (max), 30ms (min)
Colour	Star white or charcoal grey with chrome drawer front
Drawer Release	3 position key lock with Drawer Release
Options available	Note Holder Bracket, Note Divider

TUP900 Series

The complete kiosk printing solution available in modular or open frame formats



- High speed, cost efficient 150mm / second quality thermal barcode, receipt, ticket and A4 kiosk printing solution for 58mm to 112mm formats up to 150gsm / 0.15mm thick.
- Multi-position adjustable near end paper sensor with 80cm of cable for use with the high capacity paper roll supply option
- Adjustable horizontal or vertical mounted control panel with extended cable lengths
- A4 to A6 automatic scalable raster driver for reduced, legible A4 or internet output on 112mm wide paper
- Easy-load - simply lift and tilt the mechanism forward and insert the paper for automatic paper loading
- Compact footprint of just 192mm x 179mm. Smaller than many 80mm kiosk printers let alone an A4 replacement solution
- TUP992 options include:
 - 25cm paper roll holder (15cm standard). Max. capacity 18cm when mounted below printer
 - Choice of interfaces
 - PS60 power supply
- The TUP900 Series of component parts are also available for greater flexibility - TMP942 mechanism with cabling and cutter, PR900 slim line presenter, TBD900 Control Logic board, PNE sensor, PBD-9 power board etc.



TUP900 Printer Specifications

Mechanism - TMP942 & Cutter		Bar Code	UPC-A, UPC-E, JAN/EAN-8, JAN/EAN-13, ITF, CODE39, CODE93, CODE128, CODABAR (NW-7), (PDF417 & Maxicode to follow)
Print Method	Direct Thermal Line Printing	Drivers	Windows 95 / 98 / ME / 2000™, XP™, NT4.0™, OPOS™, Linux CUPS Support™, JavaPOS™, Apple MAC™, Star Raster Driver
Print Speed	up to 150mm per second	Presenter Unit - PR900	
Top Margin	15mm (3mm selectable)	Driving Motor	1 DC motor
Print Resolution	8 x 8 dots / mm (203 dpi)	Paper Loop	Upper Side Loop
Motor Torque	150gf or less	Ejecting Speed	300mm/s
Paper Feed Speed	150mm / second	Paper thickness	65g/m ² - 150g/m ² / 0.065 - 0.15mm
Paper Loading	Semi Automatic	Paper length	75mm to 300mm
Paper Specifications:		Paper Width	80 to 112mm
Width	Min. 58mm to Max. 112mm	Sensors	3 paper sensors including presenter and document capture counter
Media	Thermal Paper Rolls	Life	1 million receipts
2 colour printing	Special thermal paper required	Interface	TUP900 & TUP992 supplied without Interface
Thickness	65g/m ² - 150g/m ² / 0.065 - 0.15mm	Interface Options	USB, Parallel, Serial RS232C, 9-pin Serial
Roll Diameter	15cm / 6" standard with 25cm / 10" option (RHU-T900)	Power Supply - PS60	
Paper Sensors	Black Mark / Paper End / Paper Low Sensors as standard	Supply Voltage	24V DC, (69 W) x 32 (H) x 146 (L) mm
Autocutter	Full or Partial Cut (quillotine) Full Cut only with Presenter PR900 and TUP992	Input Voltage	100V (-10%) to 240V (+10%)
Autocutter Life	up to 1 million cuts	TUP992 Open Frame System	
Reliability	37 million lines MCBF	Overall Dimensions	192 (W) x 179 (D) x 249.3 (H) mm / 2.84Kg
Control Board TBD900		Printing Solution	All specifications for each module apply
Flash ROM / SRAM	2 x 8 Mbit plus 2 x 1 Mbit Static RAM		
Logo Store	2 Mbit		
Emulations	Star Line & Page Mode, ESC/POS™		
Code Pages	Star Mode = 40, ESC/POS™ Mode = 6 & 1 blank		



multisystems

Η multisystems διανέμει και υποστηρίζει τεχνικά, προϊόντα από τους μεγαλύτερους οίκους κατασκευής σε Barcode scanners, εκτυπωτές ετικετών, φορητά τερματικά, λύσεις πλαστικών καρτών τύπου πιστωτικής καθώς και συστήματα λιανικής πώλησης όπως συστήματα Point of sale, ταμειακές μηχανές και φορολογικούς μηχανισμούς.

Στις εγκαταστάσεις μας στο Αιγάλεω λειτουργεί πλήρως εξοπλισμένο τεχνικό εργαστήριο με άρτια καταρτισμένους μηχανικούς που μπορούν να δώσουν λύσεις ακόμα και στις πιο δύσκολες μηχανογραφικές προκλήσεις του χώρου της βιομηχανίας, της εφοδιαστικής αλυσίδας και της λιανικής.

Σας εξυπηρετούμε έναν – έναν προσωπικά προσφέροντας σας τον προσωπικό σας τεχνικό σύμβουλο ο οποίος γνωρίζει τις ανάγκες και τις ιδιαιτερότητες της επιχείρησής σας ενώ σας εξυπηρετεί σε όλη την πορεία της συνεργασίας σας μαζί μας ή εξέλιξης του έργου σας. Είμαστε δίπλα σας να σας συμβουλέψουμε να επιλέξετε τον σωστό εξοπλισμό μέσα από μια ευρύτατη γκάμα 12.000 προϊόντων τεχνολογίας για όλες τις ανάγκες από τα πιο επώνυμα εργοστάσια της παγκόσμιας αγοράς.

Για την καλύτερη εξυπηρέτησή σας έχουμε διαχωρίσει τα εμπορικά και τα τεχνικά μας τμήματα σε 6 διακριτές ενότητες τις οποίες μπορείτε να δείτε στον πίνακα που ακολουθεί προκειμένου να σας εξυπηρετούμε γρήγορα και αποτελεσματικά. Για οτιδήποτε χρειαστείτε μην διστάσετε να επικοινωνήσετε μαζί μας στο **211 780 1000**, θα χαρούμε να σας εξυπηρετήσουμε.

Η multisystems διαθέτει και υποστηρίζει



Barcode scanners

Ενσύρματα | Ασύρματα | 2D Imagers | Bluetooth IOS / Android | Λιανικής



Εκτυπωτές ετικετών & αναλώσιμα

Επιτραπέζιοι | Βιομηχανικοί | Έγχρωμοι | Ετικέτες | Μελανοταινίες



Φορητά τερματικά

Φορητά τερματικά | Βιομηχανικά Tablets | Τερματικά αυτοκινήτου / Κλαρκ



Συστήματα λιανικής πώλησης Point of sale

Συστήματα POS | Touchscreen οθόνες | Θερμικοί εκτυπωτές



Λύσεις πλαστικών καρτών

Εκτυπωτές πλαστικών καρτών | Αναλώσιμα | Πλαστικές κάρτες PVC



Φορολογικά προϊόντα

Ταμειακές μηχανές | Φορολογικοί μηχανισμοί | Φορολογικοί εκτυπωτές

Συνεργαζόμενοι οίκοι

DATALOGIC

ZEBRA

hp Gold Partner

Honeywell

PERFORMANCE PARTNER PROGRAM SILVER LEVEL

EPSON AUTHORISED PARTNER 2015

Intermec®

do™

datamax • o'neil

elo TOUCH SOLUTIONS

socket® mobile

evolis card printers

AVATO

CITIZEN Micro HumanTech



multisystems

ACR Electronics ΕΠΕ

Λεωφ. Θηβών 339, 122 43, Αιγάλεω

<http://www.multisystems.gr> | info@multisystems.gr

Tel. 211 780 1000 Fax 211 780 2000