



Symbol MiniScan MS954 Series

Fixed Mount Scanner



FEATURES

High performance fixed-mount scanner

Premium scanning on poorly printed and low contrast 1D symbols for maximum accuracy and productivity

Working range from near contact to over 35 in./88.9 cm

Flexible decode range for maximum accuracy and efficiency

Configurable scan angle of 47° and 35°

Ability to control scan angle to meet demands of application

Compact durable housing, mounting holes, LEDs and RS-232 interface

Plug-and-play installation reduces development time and speeds up time to market

Compact, durable and high performance fixed-mount bar code scanner

The Symbol MS954 is a compact, durable, fixed-mount laser bar code scanner for premium linear scanning on all types of 1D bar codes, including poorly printed and low contrast symbols.

The Symbol MS954 offers a configurable scan angle of 47° and 35° for OEM devices requiring a flexible, expanded working range. As one of the smallest, lightest and brightest fixed-mount scanners available today, the Symbol MS954 is ideal for accurate automated data collection in OEM device designs with space constraints. It can also be used as a standalone fixed-mount scanner.

Rich feature set for more flexibility in many environments

The Symbol MS954 features a configurable scan angle and a working range of over 35 inches/88.9 cm to ensure high first-time read rates for maximum productivity. The Symbol MS954 is easy to program and configure, enabling you to cut your development

time and bring your product to market faster — even if you don't have the in-house technical resources for scanner integration. With its durable housing and built-in RS-232 interface, the Symbol MS954 enables your project teams to quickly and confidently integrate high performance 1D bar code data capture into many applications.

Proven technology to enhance your solutions

With millions of installations worldwide, our OEM devices are proven to deliver high reliability and superior performance, ensuring the accurate and quick capture of data and images in your mission-critical applications and devices. In addition, an easy-to-integrate design and expert assistance from our world-class OEM support team enable you to bring your systems to market quickly and cost effectively. And since even the most intelligent products require a maintenance plan and a support strategy, we offer superior services to help you maximize uptime and maintain peak performance.

For more information on the Symbol MS954, contact us at +1.800.722.6234 or +1.631.738.2400, or visit us on the Web at www.symbol.com/ms954

SPECIFICATION SHEET

SYMBOL MINISCAN MS954 SERIES
Fixed Mount Scanner

Software controlled or manual triggering

Offers flexible control for unattended or hands-free applications

Easy-to-program simple serial interface (SSI)

Provides fast, simple communications between scanner and host

Reads all major 1D symbologies

Versatile decode capability enables devices to realize a high first-time read rate for improved productivity

Bright 650 nm laser diode

Scan line is easy to see

Software developer's kit (SDK) at no extra charge

Enables the creation of applications using familiar Microsoft® Windows® 98, 2000 and XP platforms

Applications

OEM embedded

Kiosks and ATMs; clinical diagnostics; medical instruments; blood and chemical analysis; gaming equipment; vending and lottery machines; turnstiles/access control

Fixed-mount

Manufacturing and warehousing; assembly lines; library and document tracking

Symbol MS954 Specification Highlights

Physical Characteristics

Dimensions: 1.02 in. H x 1.93 in. W x 2.31 in. D
25.90 mm H x 49.02 mm W x 58.67 mm D (nominal)

Weight: 1.67 oz./ 47.34 gm

Performance Characteristics

Light source: Visible laser diode 650 nm

Scan rate: 104 ± 12 scans per second (bi-directional)

Scan angle: Default/wide: 47° default; Alternate/narrow: 35°

Scan pattern: Linear

Skew tolerance (Yaw): ± 50° from normal

Pitch angle: ± 65° from normal

Roll: ± 35° from vertical

Minimum print contrast: Minimum 25% absolute dark/light reflectance measured at 650 nm

Symbologies: 1D: UPC/EAN, Code 128, UCC.EAN128, Code 39, Code 93, I 2 of 5, Discrete 2 of 5, Codabar, MSI, RSS and 1-D Composite codes

Programmable parameters: Laser on time, power mode, trigger mode, bi-directional redundancy, symbology types/lengths, data formatting, serial parameters, beeper tone, pattern controls

Interface: RS-232

User Environment

Ambient light: Artificial light: 450 ft. candles (4,844 Lux)
Sunlight: 10,000 ft. candles (107,640 Lux)

Operating temperature: -4° to 140°F (-20° to 60°C)

Storage temperature: -40° to 158°F (-40° to 70°C)

Humidity: 5% to 95% noncondensing

Power:

Input voltage: 5.0 VDC ±10%

Scanning current: 95 mA typical; 125 mA max

Standby current: 27 mA typical; 50 mA max

Vcc noise level: 200mV peak-to-peak max

Drop: Unit functions normally after multiple 30 in./76 cm drops to concrete

Regulatory


Laser classification: CDRH Class II, IEC Class 2

Electrical safety: Certified to UL1950, CA C22-2 N0950 ENG60950/IEC950

EMI/RFI: FCC Part 15 Class B, ICES-003 Class B European Union EMC Directive, Australian SMA

Environmental: ROHS-compliant

Symbol MS954 Decode Zone

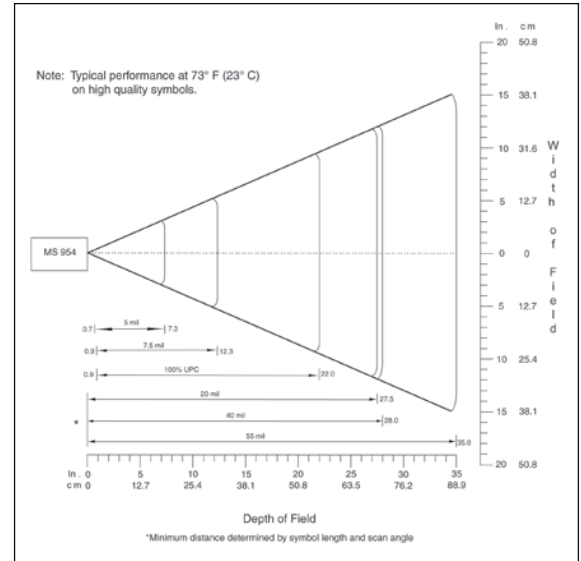

MOTOROLA

motorola.com

Part number SS-MS954. Printed in USA 07/07. MOTOROLA and the Stylized M Logo and SYMBOL and the SYMBOL Logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. ©2007 Motorola, Inc. All rights reserved. For system, product or services availability and specific information within your country, please contact your local Motorola office or Business Partner. Specifications are subject to change without notice.



multisystems

Η multisystems διανέμει και υποστηρίζει τεχνικά, προϊόντα από τους μεγαλύτερους οίκους κατασκευής σε Barcode scanners, εκτυπωτές ετικετών, φορητά τερματικά, λύσεις πλαστικών καρτών τύπου πιστωτικής καθώς και συστήματα λιανικής πώλησης όπως συστήματα Point of sale, ταμειακές μηχανές και φορολογικούς μηχανισμούς.

Στις εγκαταστάσεις μας στο Αιγάλεω λειτουργεί πλήρως εξοπλισμένο τεχνικό εργαστήριο με άρτια καταρτισμένους μηχανικούς που μπορούν να δώσουν λύσεις ακόμα και στις πιο δύσκολες μηχανογραφικές προκλήσεις του χώρου της βιομηχανίας, της εφοδιαστικής αλυσίδας και της λιανικής.

Σας εξυπηρετούμε έναν – έναν προσωπικά προσφέροντας σας τον προσωπικό σας τεχνικό σύμβουλο ο οποίος γνωρίζει τις ανάγκες και τις ιδιαιτερότητες της επιχείρησής σας ενώ σας εξυπηρετεί σε όλη την πορεία της συνεργασίας σας μαζί μας ή εξέλιξης του έργου σας. Είμαστε δίπλα σας να σας συμβουλέψουμε να επιλέξετε τον σωστό εξοπλισμό μέσα από μια ευρύτατη γκάμα 12.000 προϊόντων τεχνολογίας για όλες τις ανάγκες από τα πιο επώνυμα εργοστάσια της παγκόσμιας αγοράς.

Για την καλύτερη εξυπηρέτησή σας έχουμε διαχωρίσει τα εμπορικά και τα τεχνικά μας τμήματα σε 6 διακριτές ενότητες τις οποίες μπορείτε να δείτε στον πίνακα που ακολουθεί προκειμένου να σας εξυπηρετούμε γρήγορα και αποτελεσματικά. Για οτιδήποτε χρειαστείτε μην διστάσετε να επικοινωνήσετε μαζί μας στο **211 780 1000**, θα χαρούμε να σας εξυπηρετήσουμε.

Η multisystems διαθέτει και υποστηρίζει



Barcode scanners

Ενσύρματα | Ασύρματα | 2D Imagers | Bluetooth IOS / Android | Λιανικής



Εκτυπωτές ετικετών & αναλώσιμα

Επιτραπέζιοι | Βιομηχανικοί | Έγχρωμοι | Ετικέτες | Μελανοταινίες



Φορητά τερματικά

Φορητά τερματικά | Βιομηχανικά Tablets | Τερματικά αυτοκινήτου / Κλαρκ



Συστήματα λιανικής πώλησης Point of sale

Συστήματα POS | Touchscreen οθόνες | Θερμικοί εκτυπωτές



Λύσεις πλαστικών καρτών

Εκτυπωτές πλαστικών καρτών | Αναλώσιμα | Πλαστικές κάρτες PVC



Φορολογικά προϊόντα

Ταμειακές μηχανές | Φορολογικοί μηχανισμοί | Φορολογικοί εκτυπωτές

Συνεργαζόμενοι οίκοι

DATALOGIC

ZEBRA

hp Gold Partner

Honeywell

PERFORMANCE PARTNER PROGRAM SILVER LEVEL

EPSON AUTHORISED PARTNER 2015

Intermec®

do™

datamax • o'neil

elo TOUCH SOLUTIONS

socket® mobile

evolis card printers

AVATO

CITIZEN Micro HumanTech



multisystems

ACR Electronics ΕΠΕ

Λεωφ. Θηβών 339, 122 43, Αιγάλεω

<http://www.multisystems.gr> | info@multisystems.gr

Tel. 211 780 1000 Fax 211 780 2000